

PRODUCT NAME

RA-412

LIFETIME (hrs) as a FUNCTION of RPM & TORQUE						
Torque	RPM					
	50	100	200	500	1000	2000
17	20,000	20,000	20,000	20,000	20,000	10,000
18	20,000	20,000	20,000	20,000	11,000	4,500
19	20,000	20,000	20,000	10,000	4,500	1,900
20	20,000	20,000	12,000	4,500	2,000	800
21	20,000	10,000	5,500	1,900	900	400
22	14,000	7,000	3,300	1,300	620	280
23	10,500	5,000	2,500	950	450	220


2,000 RPM Maximum
Standard Backlash of 1°

- Torque from 17 to 23 inch*ounces
- Application rated for optimum operation and cost
- You can balance Torque to RPM and Operating Life
- Backlash 1°
- Low Backlash 1/2°
- Weight of only 0.16 lb.
- RPM to 2000
- Temp range -5° F to +175° F, -40° F grease optional
- Made in USA with American CNC machines

MATERIALS

303 Stainless Steel Shafts
Anodized Aluminum Housing
Sealed Steel Ball Bearings
Greased for life: Shell Alvania EP2. Cold temp. grease optional

Exclusive 24 Month Warranty!
See our website for CAD files

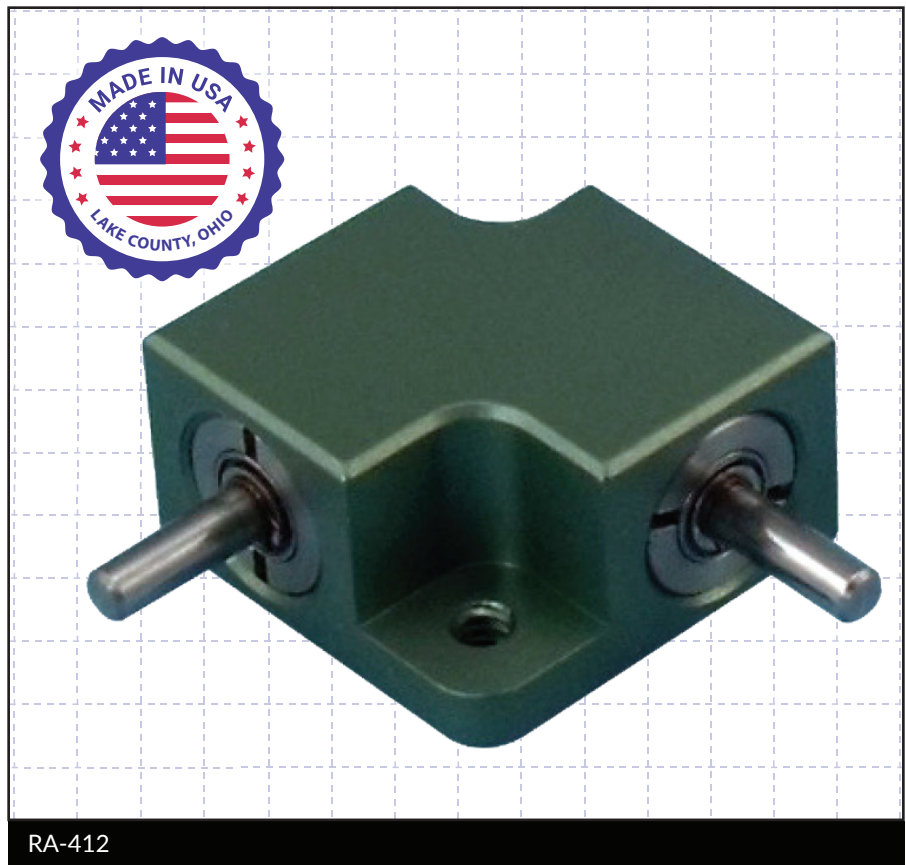

RA-412

1:1 GEARBOXES

UNIQUELY RATED SO YOU CAN BALANCE TORQUE TO RPM TO LIFE

ADDITIONAL INFORMATION

Calculations are based on an application factor of 1.25. They apply to a medium impact drive turning a uniform load or a uniform drive turning a moderate impact load. Life Time figures shown are for guidance only. Testing in your application is required. You will need to assess duty cycles and confirm suitability with your own calculations.

TECHNICAL DRAWING

